


TW50 TECHNICAL DATA SHEET

ABN : 77 611 917 036

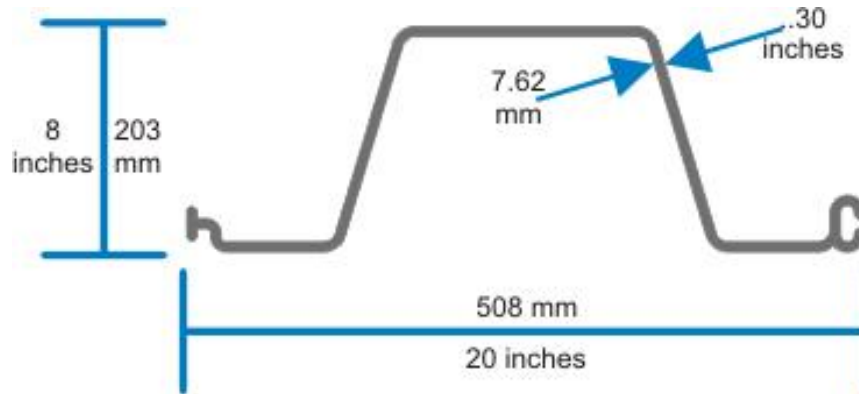

Constituent Material	PVC, Exterior Grade Rigid only	PVC, Exterior Grade Rigid only	
Section Width (W)	20 inches	508 mm	
Section Depth (D)	8 inches	203 mm	
Section Thickness (T)	.300 inches	7.62 mm	
Weight	6.5 lbs/lineal foot	9.41 kg/lineal meter	
Moment of Inertia	70.7 in4/ft	9,655 cm4/m	
Section Modulus	16.1 in3/ft	866 cm3/m	
Ultimate Moment	8,720 ft-lbs/ft	4,005 kg-m/m	
Allowable Moment	4,360 ft-lbs/ft	2,002 kg-m/m	
Tensile Strength	ASTM-D638	6,500 lbs/in2	44.8 Mpa
Flexural Strength	ASTM-D790	11,140 Psi	78.0 Mpa
Modulus of Elasticity	ASTM-D790	380,000 Psi	2,620 Mpa
Notched Izod Impact	ASTM-D256	13.75 lbs/in	2.46 kg/cm
Heat Deflection Temperature	ASTM-D648	158 degrees F	70 degrees C

Available Colors Tidewall Vinyl Sheet Piling comes in a standard color of light gray, but it is also available in clay, slate, tan, brown, and other custom colors upon request.

UV Protection All Tidewall Products are produced from highly weatherable, UV-stabilized rigid PVC.

Lifetime Warranty Tidewall Vinyl Sheet Piling products are covered by a transferable 60 year Limited Warranty that protects against manufacturing defects.